




Dati tecnici <Dibad P39 16>

Altezza H (mm)	Codice articolo	Largh. L (mm)	Interas. N (mm)	Peso P (kg)	Conten. d'acqua L (litri)	Esp. n	Resa term. EN 442 [W] At=50K 75/65/20°C	Resistenza Potenza [W]
713	57000070045 **	435	405	4,70	1,70	1,25	278	400
	57000070050 **	485	455	5,30	1,90	1,25	315	400
	57000070055 **	535	505	5,90	2,10	1,25	352	400
	57000070060 **	585	555	6,10	2,20	1,25	383	400
	57000070075 **	735	705	7,30	2,60	1,24	484	400
	57000070100 **	985	955	9,30	3,20	1,23	646	800
1145	57000110045 **	435	405	7,10	2,70	1,28	421	400
	57000110050 **	485	455	8,10	3,10	1,27	477	400
	57000110055 **	535	505	9,00	3,40	1,27	533	400
	57000110060 **	585	555	9,30	3,50	1,27	581	400
	57000110075 **	735	705	11,20	4,00	1,26	732	800
	57000110100 **	985	955	14,30	5,00	1,25	981	800
1469	57000140045 **	435	405	9,30	3,60	1,27	544	400
	57000140050 **	485	455	10,50	4,10	1,27	616	800
	57000140055 **	535	505	11,80	4,60	1,27	689	800
	57000140060 **	585	555	12,30	4,70	1,27	747	800
	57000140075 **	735	705	14,70	5,40	1,27	943	800
	57000140100 **	985	955	18,80	6,70	1,27	1261	1200
1757	57000170045 **	435	405	10,70	4,20	1,27	613	800
	57000170050 **	485	455	12,10	4,70	1,26	694	800
	57000170055 **	535	505	13,50	5,30	1,26	776	800
	57000170060 **	585	555	14,00	5,40	1,26	843	800
	57000170075 **	735	705	16,90	6,30	1,25	1062	1200
	57000170100 **	985	955	21,60	7,70	1,24	1423	1200


Dibad P39 16

Scaldasalviette dall'abbinamento particolare: montanti a "D" e tubi orizzontali con Ø 16 per una linea piacevole ed elegante.




16 Tubi


H = ALTEZZA
L = LARGHEZZA
N = INTERASSE
V = ANDATA G1/2
R = RITORNO G1/2
E = SPIATO G1/2

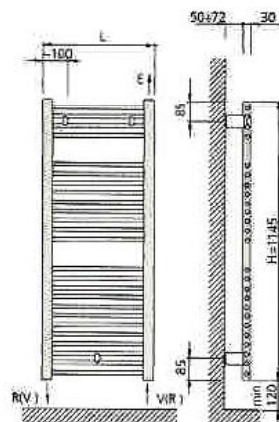

25 Tubi

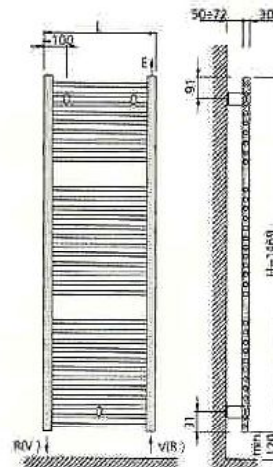

33 Tubi

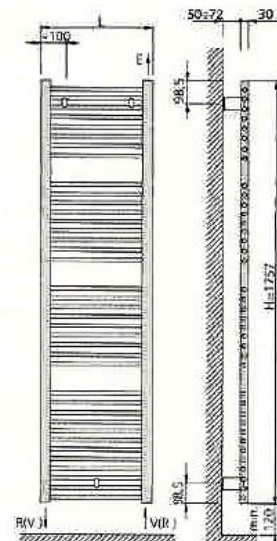

38 Tubi