



180W-200W Mono Crystalline Solar Panel




正面
Front Side

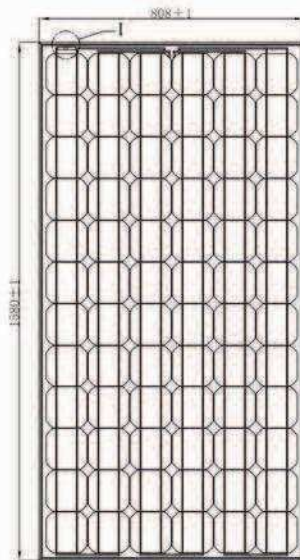

側面
Side Face

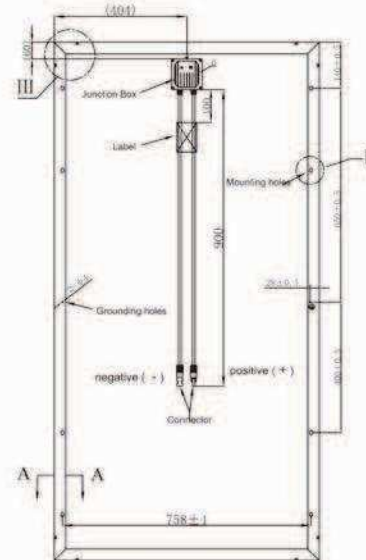

背面
Back Side

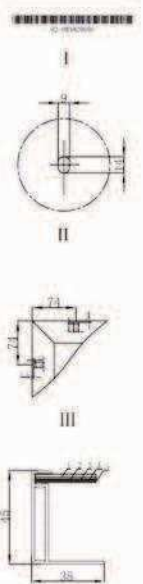

Section A-A

Electrical Characteristics					
Pmax	180W	185W	190W	195W	200W
Power Tolerance			+ 5%		
Max Power Voltage(Vmp)	36.0V	36.0V	36.5V	38.45V	38.59V
Max Power Current(Imp)	5.0A	5.14A	5.2A	5.07A	5.18A
Opening Circuit Voltage(Voc)	43.2V	43.2V	43.8V	56.14V	46.31V
Short Circuit Current(Isc)	5.6A	5.76A	5.83A	5.68A	5.80A
Standard Test Condition(Stc)	1000W/M ² , AM1.5, 25°C				
Max System Voltage	1000VDC(TUV), 600VDC(UL)				
Max Series Fuse Rating	10A				
Specification					
Cell Quantity	72pcs(6x12)				
Cell Type	125x125mm mono solar cell				
Module Size	1580x808x35mm				
Net Weight	15.5kg				
Cable	Cable diameter: 4.0mm ² , cable length: 900mm				
Tempered Glass	3.2mm iron tempered glass				
Frame	Anodized Aluminum frame				
Physical Characteristics					
Operating Temperature	-40°C +85°C				
Storage Temperature	-40°C +85°C				
Hailstone Impact Test	25mm at 20.3m/Second				
Temperature Coefficient					
NOCT	47 ± 2°C				
Temperature Coefficient Of Pmax	-0.5%/°C				
Temperature Coefficient of Voc	-0.34%/°C				
Temperature Coefficient of Isc	0.05%/°C				
Production Standard					
	ISO9001, IEC61215, IEC61730, TUV, UL				
Package Characteristics					
Carton	26pcs/ctn				
40HG	728pcs				