


AN·TRAX IT








TTv DESIGN MATTEO THUN & ANTONIO RODRIGUEZ


[A] attacco standard
standart connection
raccord standard
standard Anschluss
conexión estándar

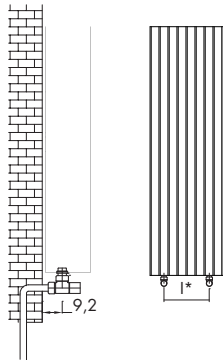

[H] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial

SOVATTINCTT

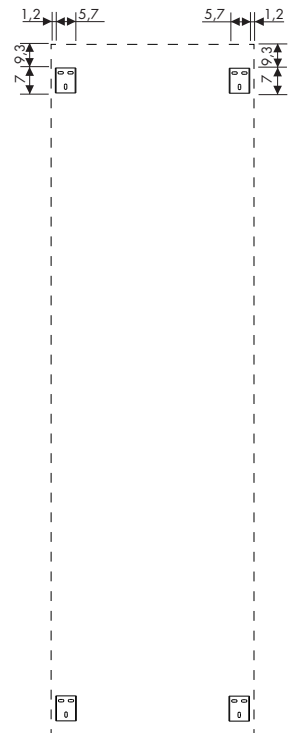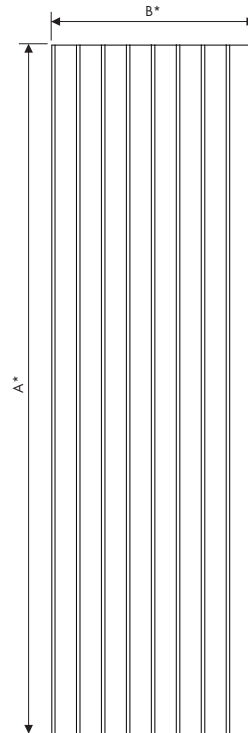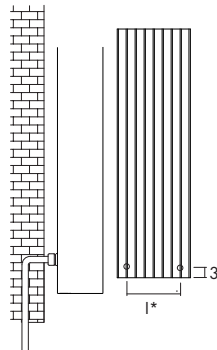

Colori/ colours / couleurs / Farbe / colores

[B] B standard
[T] T colori T
[S] S colori S
[S RAL] = [B] + 20% _ RAL non inclusi in tabella/ special RAL colours not included in the colour chart / couleurs RAL spéciales non inclus dans le nuancier couleurs/
RAL Farbe nicht in der Tabelle inbegriffen / colores RAL especiales no incluidos en la carpeta de color


Optional

[A] Valvola a squadra
Angled Valve
Robinet équerre
Eckausführung Ventil
Válvula a escuadra



AVC12SQSKITR [CROM]
AVC12SQSKITB [BIAN]

[H] Valvole da incasso
Built in valves
Einbauventile
Robinets à encaisse
Válvulas de empotrar



AVC12VISKITR [CROM]

Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.259
Watt Δt 40° = Watt Δt 50° x 0.754
Watt Δt 30° = Watt Δt 50° x 0.524
Watt Δt 20° = Watt Δt 50° x 0.314

p max = 5 bar

TTv										Watt Δt 50°
No. el.	A* B*		59	66	68	88	150	180	200	
5	29.0	21.0	354	392	403	509	846	1 004	1 112	
6	36.0	28.0	452	500	513	649	1 073	1 273	1 410	
7	43.0	35.0	551	610	627	792	1 304	1 548	1 714	
8	50.0	42.0	653	722	742	938	1 540	1 827	2 023	
9	57.0	49.0	756	837	860	1 086	1 778	2 110	2 336	
10	64.0	56.0	861	953	979	1 237	2 019	2 396		
11	71.0	63.0	967	1 071	1 100	1 390				
12	78.0	70.0	1 075	1 190	1 222	1 544				
13	85.0	77.0	1 184	1 310	1 346	1 700				
14	92.0	87.0	1 294	1 432	1 471	1 858				
15	99.0	91.0	1 404							
16	106.0	98.0	1 516							


I*  	53 cm	60 cm	62 cm	82cm
	PIASTRE	ALLUMINIO	GHISA	

L* 	0.28	0.30	0.31	0.36	0.54	0.62	0.68
--	------	------	------	------	------	------	------


A* = altezza / height / hauteur / Höhe / alto
B* = larghezza / width / longueur / Breite / ancho
art* = articolo / model / modèle / Artikel / artículo
I* = Interasse / pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
L* = contenuto d'acqua / water content for each element / volume d'eau pour chaque element/Wassergehalt für Element / contenido de agua por caola elemento



TTo DESIGN MATTEO THUN & ANTONIO RODRIGUEZ







[A] attacco standard
standard connection
raccord standard
standard Anschluss
conexión estándar




[H] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial

SOVATTINCTT

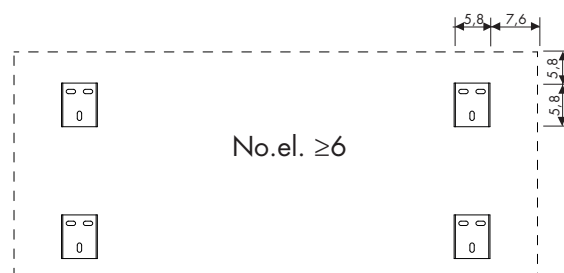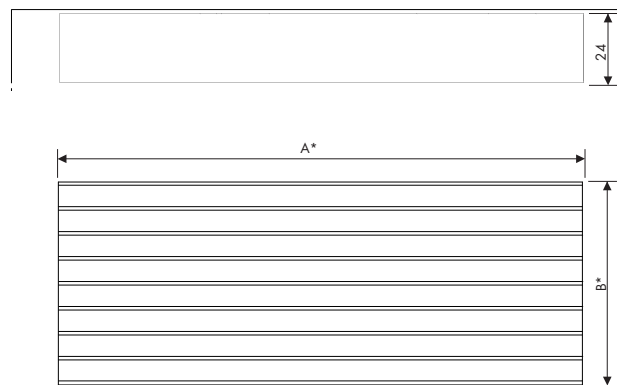

No.el. ≥ 6

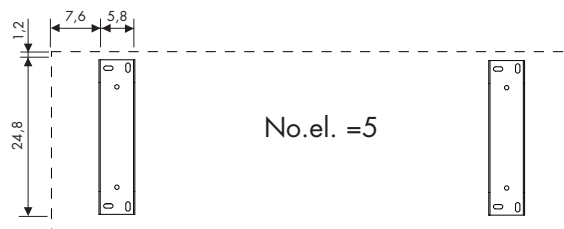

No.el. = 5

Colori/ colours / couleurs / Farbe / colores

[B] B standard
[T] T colori T
[S] S colori S
[S RAL] = [B] + 20% _ RAL non inclusi in tabella/ special RAL colours not included in the colour chart / couleurs RAL spéciales non inclus dans le nuancier couleurs/
RAL Farbe nicht in der Tabelle inbegriffen / colores RAL especiales no incluidos en la carpeta de color


Optional

[A] Valvola a squadra
Angled Valve
Robinet équerre
Eckausführung Ventil
Válvula a escuadra



AVC12SQSKITR [CROM]
AVC12SQSKITB [BIAN]

[H] Valvole da incasso
Built in valves
Einbauventile
Robinets à encaisse
Válvulas de empotrar



AVC12VISKITR [CROM]

Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.245
Watt Δt 40° = Watt Δt 50° x 0.765
Watt Δt 30° = Watt Δt 50° x 0.541
Watt Δt 20° = Watt Δt 50° x 0.332

p max = 5 bar

TTo										Watt Δt 50°
No. el.	A* B*		59	66	68	88	150	180	200	
5	29.0		307	341	352	446	728	874	978	
6	36.0		364	404	417	529	863	1 037	1 160	
7	43.0		419	465	480	609	993	1 194	1 335	
8	50.0		473	525	542	688	1 121	1 347	1 507	
9	57.0		526	584	603	765	1 247	1 498	1 676	
10	64.0		579	642	663	841	1 371	1 647		
11	71.0		630	699	722	916				
12	78.0		682	756	781	991				
13	85.0		733	813	840	1 066				
14	92.0		785	870	899	1 140				
15	99.0		836							
16	106.0		887							

I*		53	60	62	82	144	174	194
[H] attacco speciale / special connection raccord spéciale / speziell Anschluss / conexión especial						58	88	108
L*		0.28	0.29	0.30	0.36	0.54	0.62	0.68